
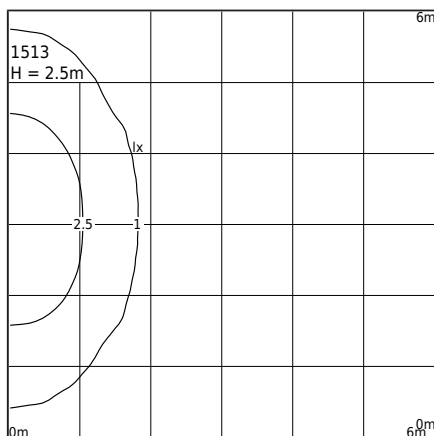
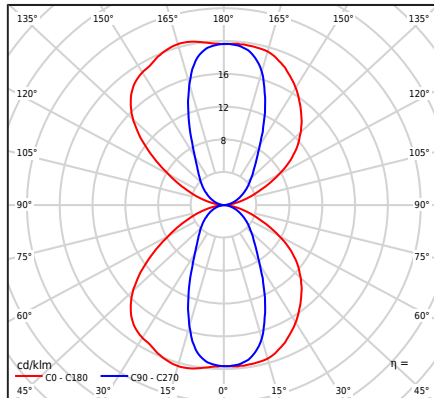
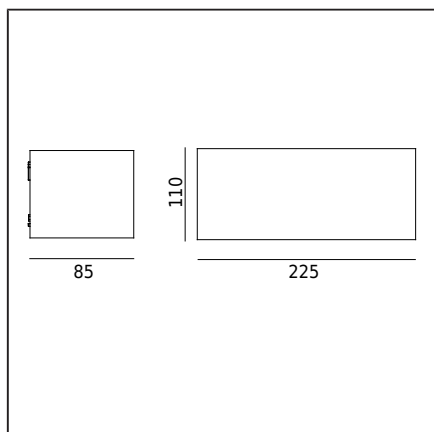


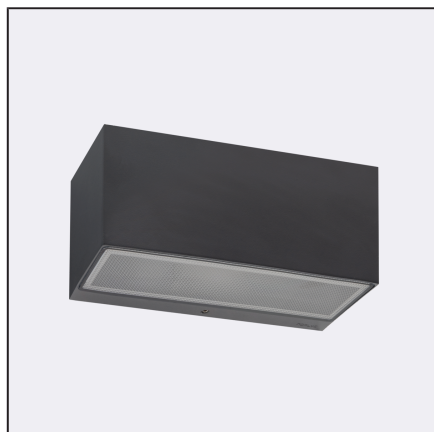

## Type of luminaire

|                                  |                                                                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Type of luminaire                | Wall light,                                                                                                                                |
| Photometric body                 | Double-sided light facing up and down.                                                                                                     |
| Characteristics of the luminaire | Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts. |

## General information

|                                 |                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials                       | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.                                                                                      |
| Mounting method                 | Fixing of the luminaire: 2 holes $\varnothing 5\text{mm}$ .                                                                                                                                                           |
| Terminal                        | Connection terminals: max $3 \times 2,5\text{mm}^2$ , possibility to connect luminaire in loop max $3 \times 1,5\text{mm}^2$ . A round wire in the isolation with a diameter of $\varnothing 7 \dots 10,5\text{mm}$ . |
| Type of light source            | E27 Lamp<br>Replaceable light source by an end-user.                                                                                                                                                                  |
| Net / gross weight of luminaire | 1,16kg / 1,3kg                                                                                                                                                                                                        |
| Box dimensions [cm]             | 24,5cm x 12,5cm x 10,5cm                                                                                                                                                                                              |
| Luminaire dimensions [cm]       | 22,5cm x 11cm x 8,5cm                                                                                                                                                                                                 |

## Technical data

|                                                                                                         |                               |
|---------------------------------------------------------------------------------------------------------|-------------------------------|
| Luminaire wattage                                                                                       | LED max 9W                    |
| Ta Rated temperature                                                                                    | +25°C, up to +50°C on request |
| Ambient temperature                                                                                     | TA MAX=+65°C                  |
| Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable). |                               |
| BUG rating                                                                                              | B0-U0-G0                      |

## Recommended light sources

|                                      |                                              |
|--------------------------------------|----------------------------------------------|
| Osram LED Parathom Classic E27       | Philips Master LEDbulb / Ledbulb Classic E27 |
| Osram ECO PRO Classic 46 <=> 60W E27 | Philips ECO Classic 42 <=> 60W E27           |

## Files to download

|                       |                       |
|-----------------------|-----------------------|
| Photometric LDT files | Photometric IES files |
| Manual                | BIM Revit             |
| BIM ArchiCAD          |                       |

## Indexes

| Index  | Color        | RAL          |
|--------|--------------|--------------|
| 1513AL | ALUMINUM     | 9006         |
| 1513BL | BLACK        | 9005         |
| 1513CG | CEMENT GREY  | 7033         |
| 1513CB | COPPER BROWN | 8004         |
| 1513CS | CORTEN STEEL | approx. 8011 |
| 1513GR | GRAPHITE     | 7016         |
| 1513GB | GRAY BEIGE   | 7006         |
| 1513WH | WHITE        | 9003         |